



Filtr workowo-magnetyczny

Sack-magnetic filter


KKF-1

Dn=25÷40


KKF-F-1÷3

Dn=25÷40

Typ filtra	dn	D (mm)	d1	d2	H	L	b	ht	R	pn (MPa)	tr (°C)	G (m ³ /h)	KV (m ³ /h)
KKF 1/25	25	108	3/8"	3/4"	585	285	385	-	100	1,6	160	3	4,0
KKF-F-1	25	108	3/8"	3/4"	585	285	385	-	100	1,6	160	3	4,0
KKF 1/32	32	108	3/8"	3/4"	585	285	385	-	100	1,6	160	5	9,5
KKF-F-2	32	108	3/8"	3/4"	585	285	385	-	100	1,6	160	5	9,5
KKF 1/40	40	108	3/8"	3/4"	585	285	385	-	100	1,6	160	7	12,0
KKF-F-3	40	108	3/8"	3/4"	585	285	385	-	100	1,6	160	7	12,0

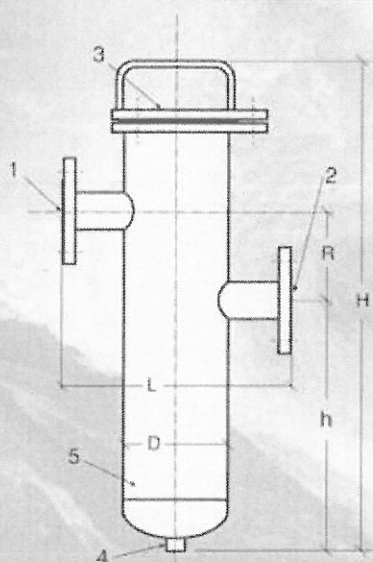

1. Króciec wlotowy dn
Inlet connector dn
2. Króciec wylotowy dn
Outlet connector dn
3. Króciec odpowietrzający d1
Deaerating connector d1
4. Króciec spustowy d2
Draining connector d2
5. Zbiornik filtra D
Filter tank D

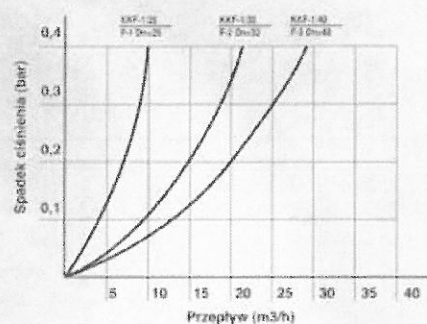

UWAGA! Filtry F-1÷3 mogą być czyszczone przeciwwąadowo.
Sposób czyszczenia patrz DTR
NOTE! Filters F-1÷3 may be cleaned counter-currently.
The mode of cleaning: see DTR

